

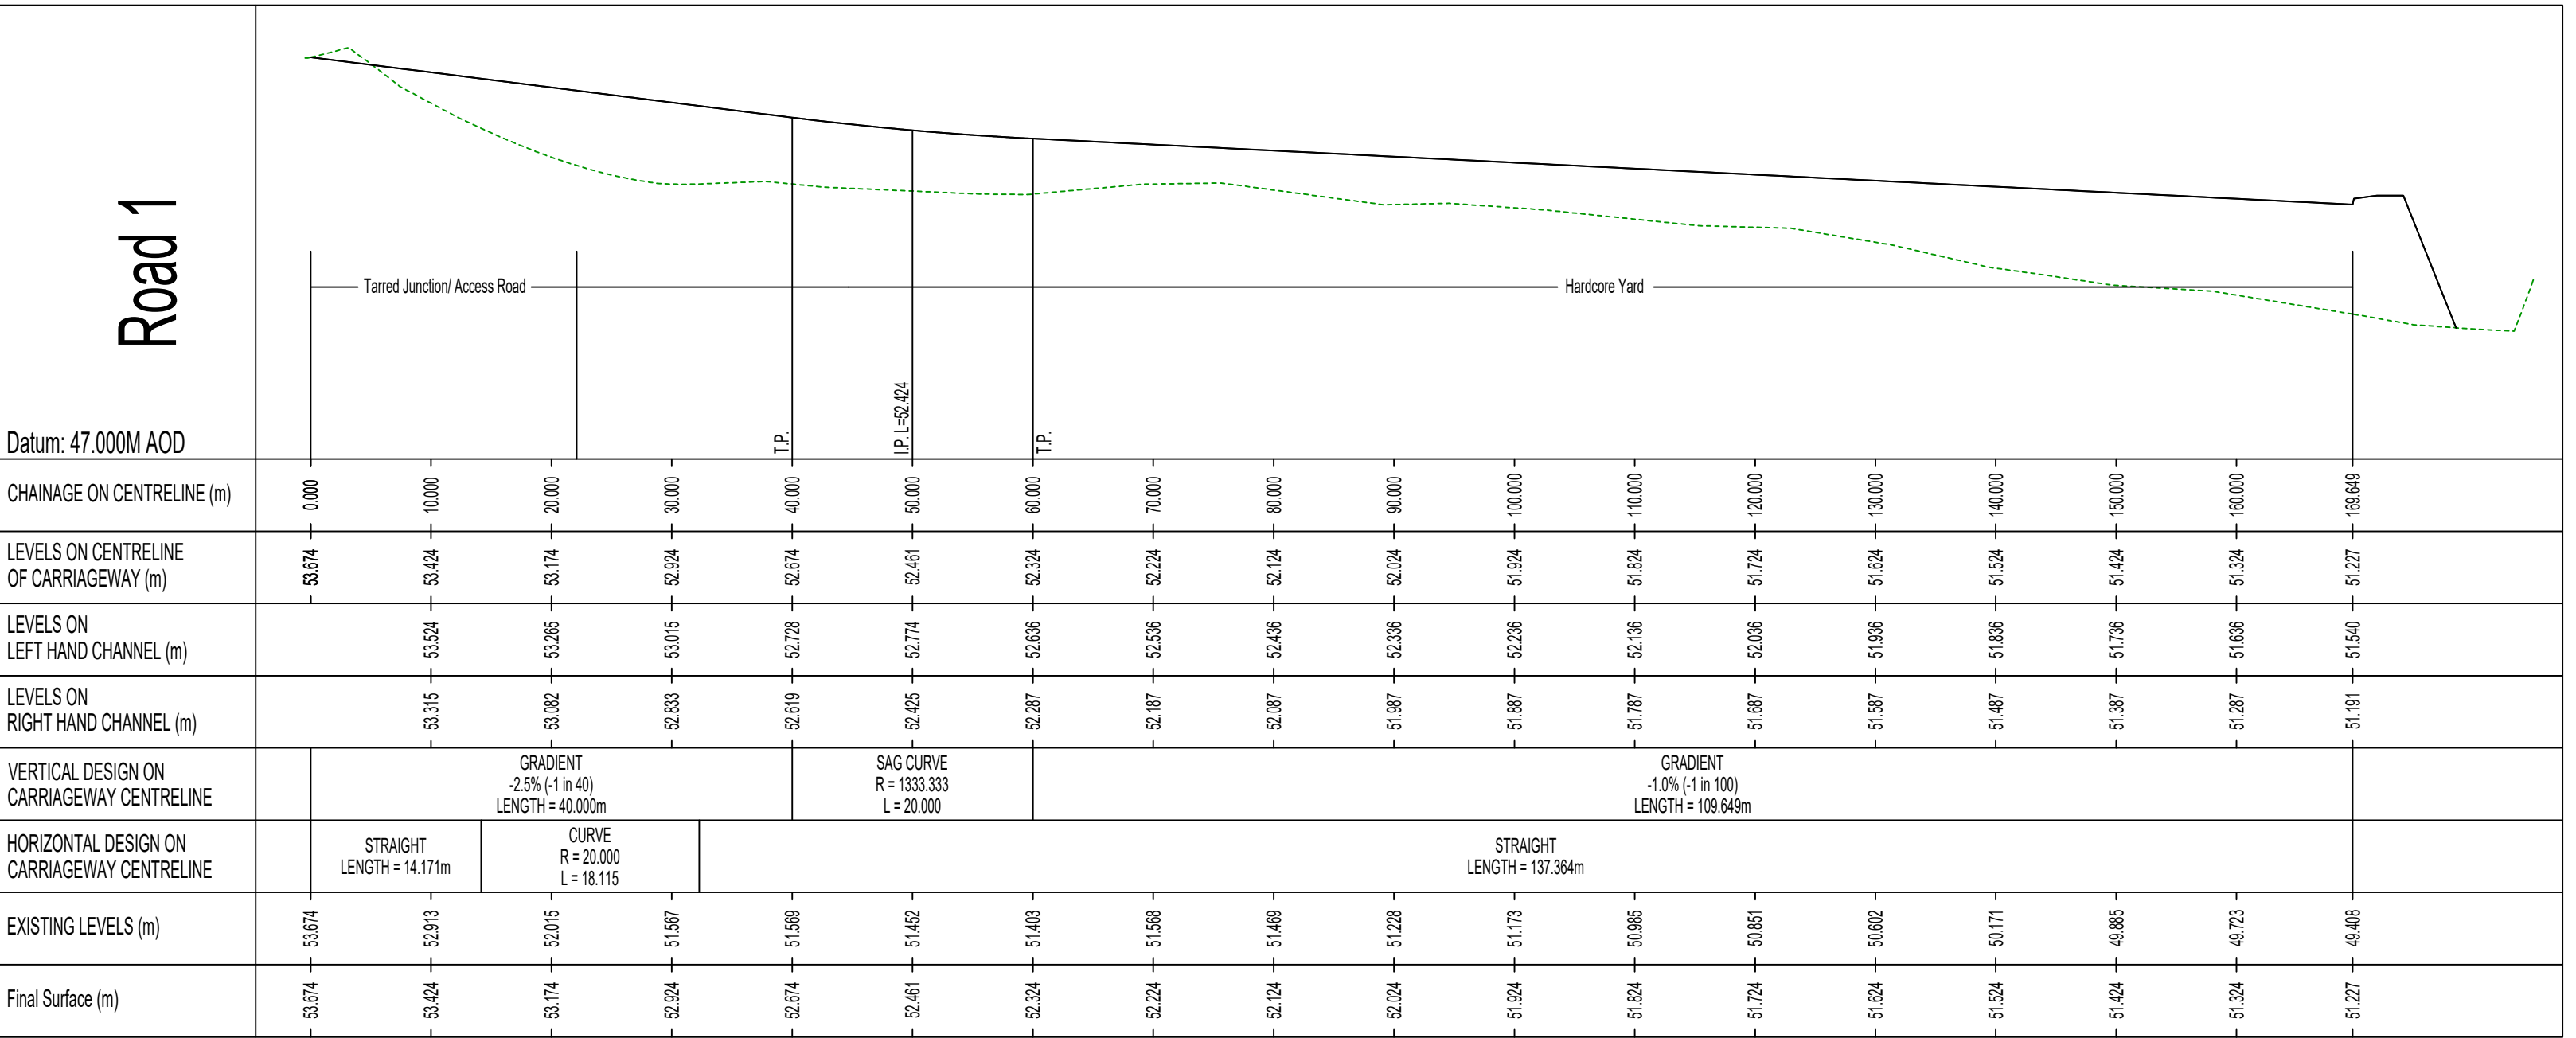


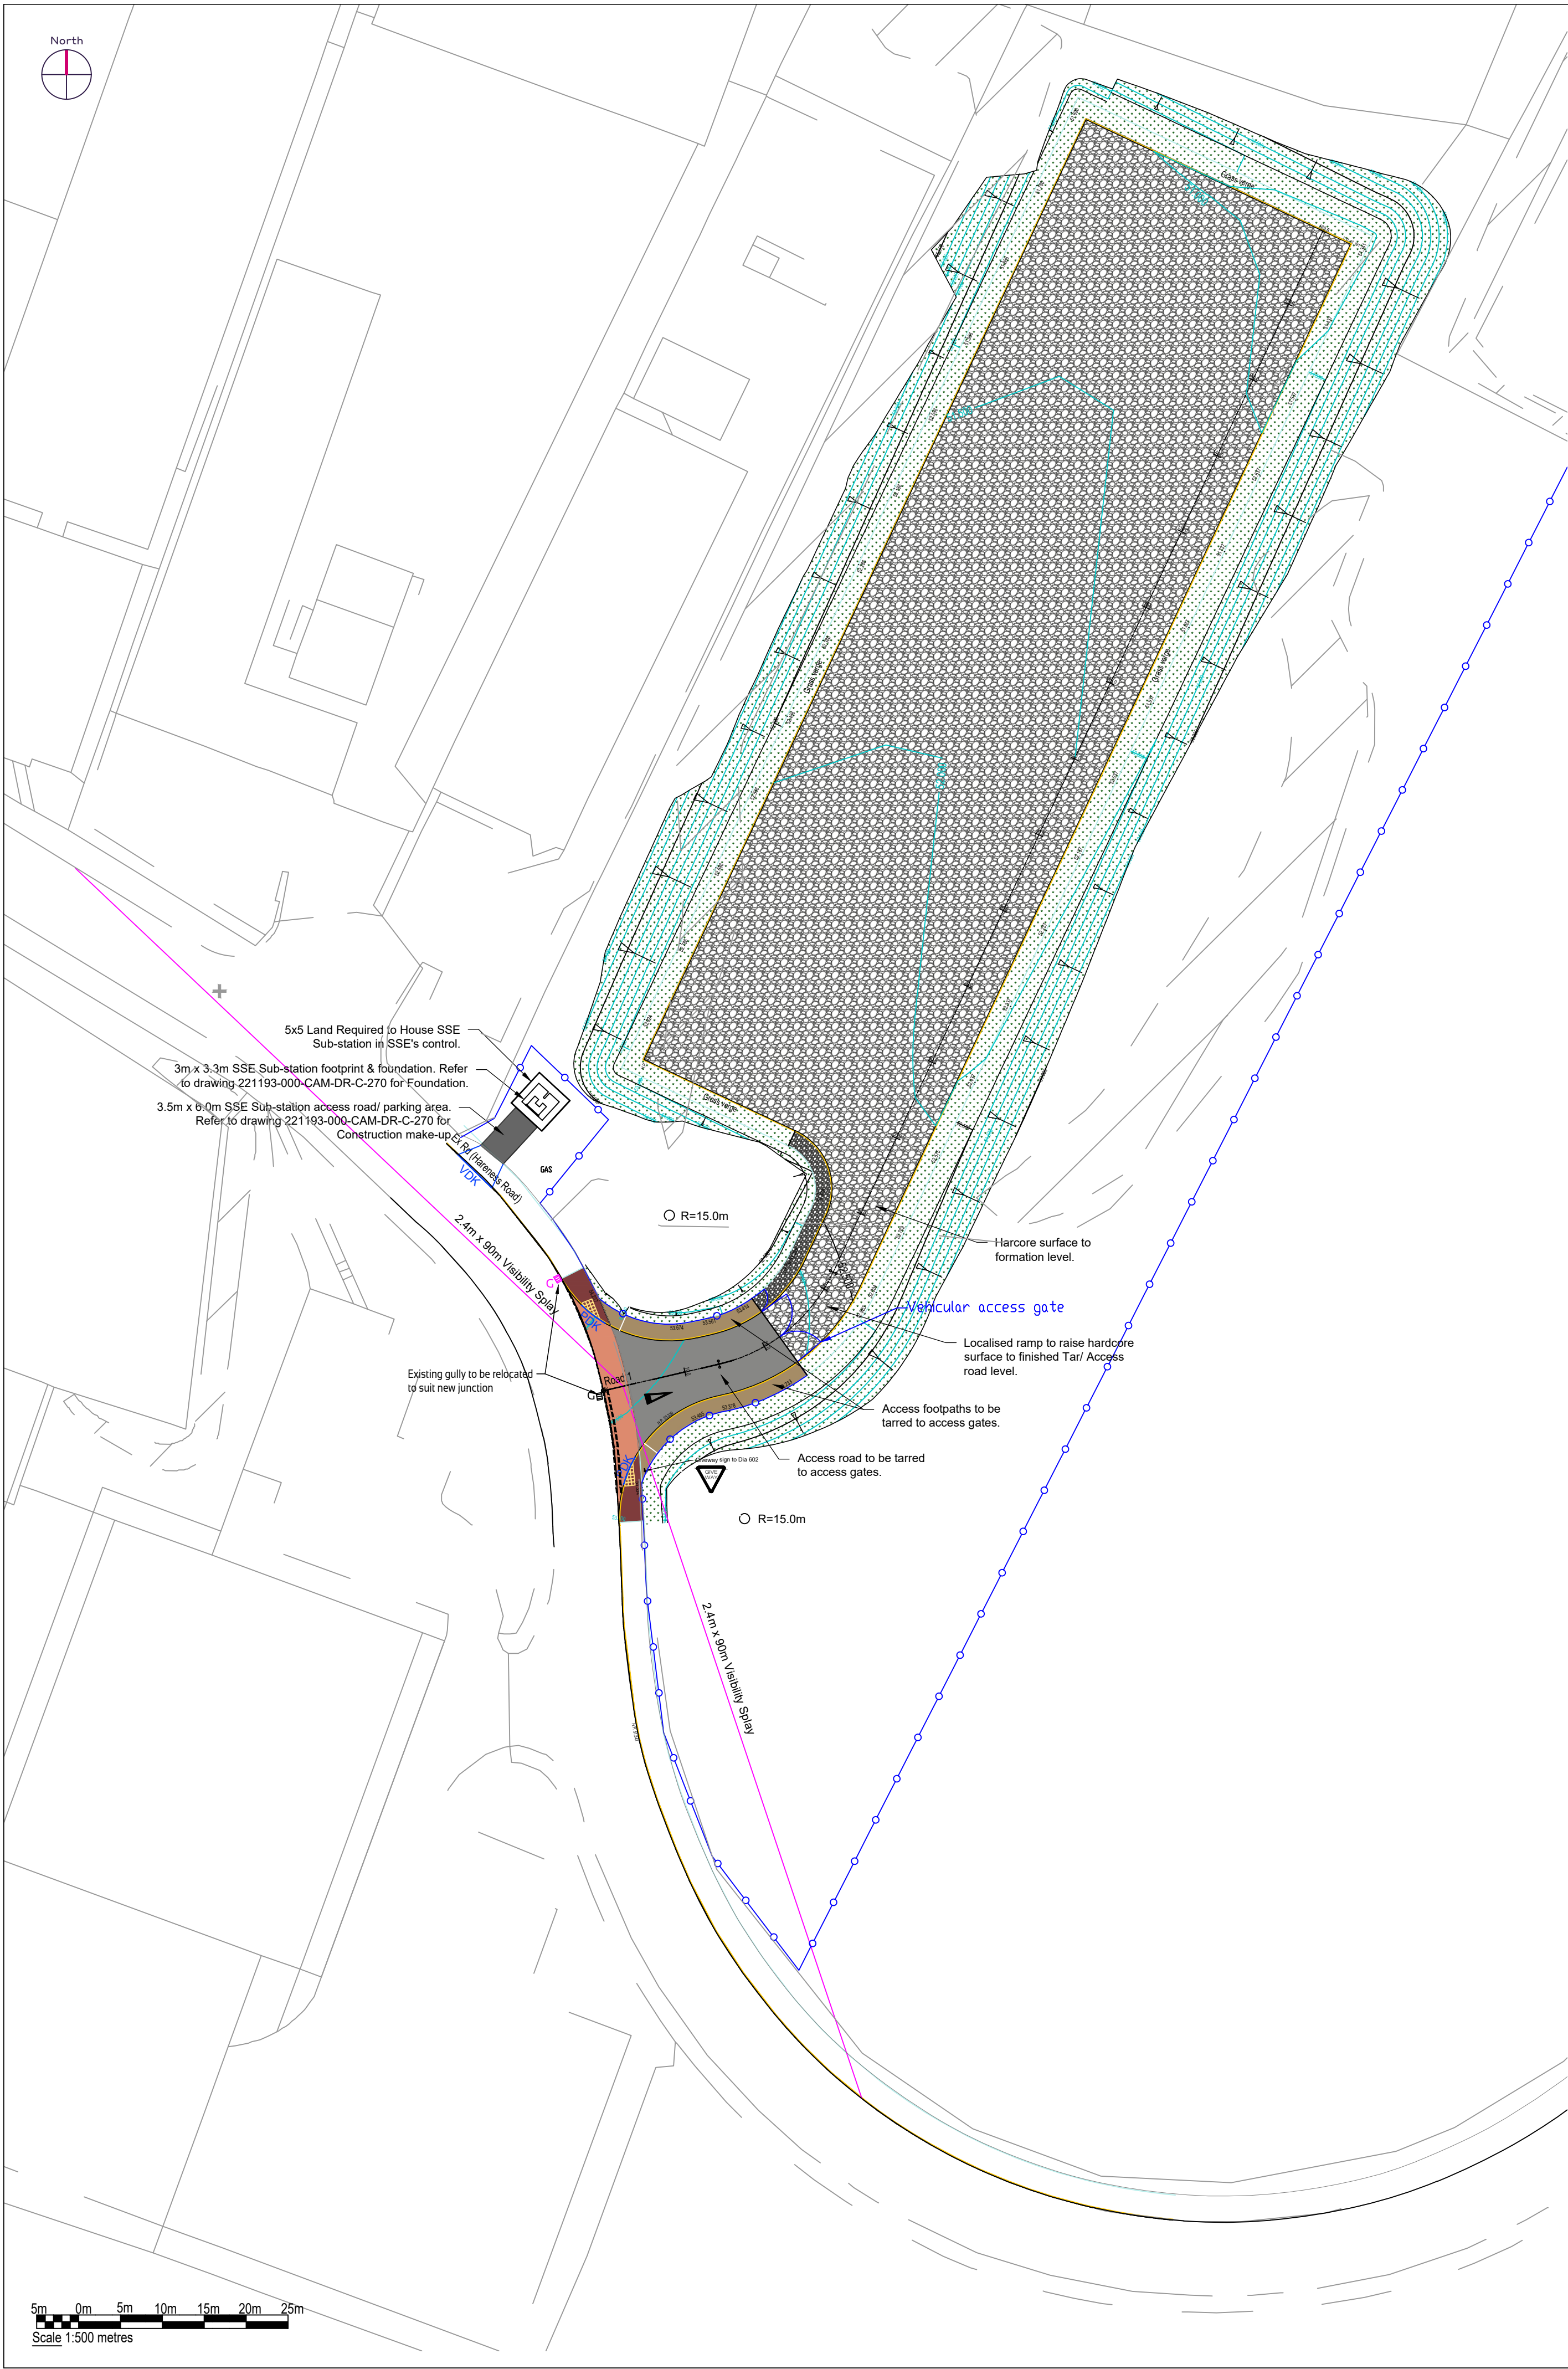

- Notes:**
- All work to comply with Aberdeen City Councils' - Enterprise Planning & Infrastructure guidelines and specification for roads within residential and industrial developments.
 - Prior to roads construction works, the appointed Contractor is to discuss with Aberdeen City Council engineer exact requirement for laboratory CBR PSD & MCV tests. All results must be submitted and details of any capping requirements to the roads officer who is processing the RCC application.
 - Road signs and markings to be in accordance with the Traffic Signs Regulations And General Directions (TSRGD) 2016.
 - The contractor is responsible for checking the line and level of existing services prior to the commencement of works. Any discrepancies from design information must be reported to the Site Manager and Site Engineer in writing.
 - Street occupation should be sought from the local authority prior to works commencing on a public road.
 - Street name plate positions to be agreed on site with Aberdeen City Council prior to installation. Positions shown on road layout drawing are indicative.
 - Visibility splay envelopes to be under the control of the roads authority. Visibility area to be kept clear of planting and obstructions over 600mm high.
 - Non-adopted areas to drain via porous paving or free draining gravel. Where parking areas or driveway's fall towards the adopted carriageway, a channel drain or gully is to be provided to prevent water running onto adopted areas.

- Legend:**
- Denotes extent of roads subject to RCC Application and to be adopted by Aberdeen City Council.
 - Denotes extent of footways/footpaths subject to RCC Application and be adopted by Aberdeen City Council.
 - Visibility Splays (To be kept clear of planting or construction over 600mm high).
 - PDK Pedestrian drop kerb (+6mm upstand max)
 - VDK Vehicle drop kerb (+20mm upstand max)
 - Tactile Blister Paving Slabs

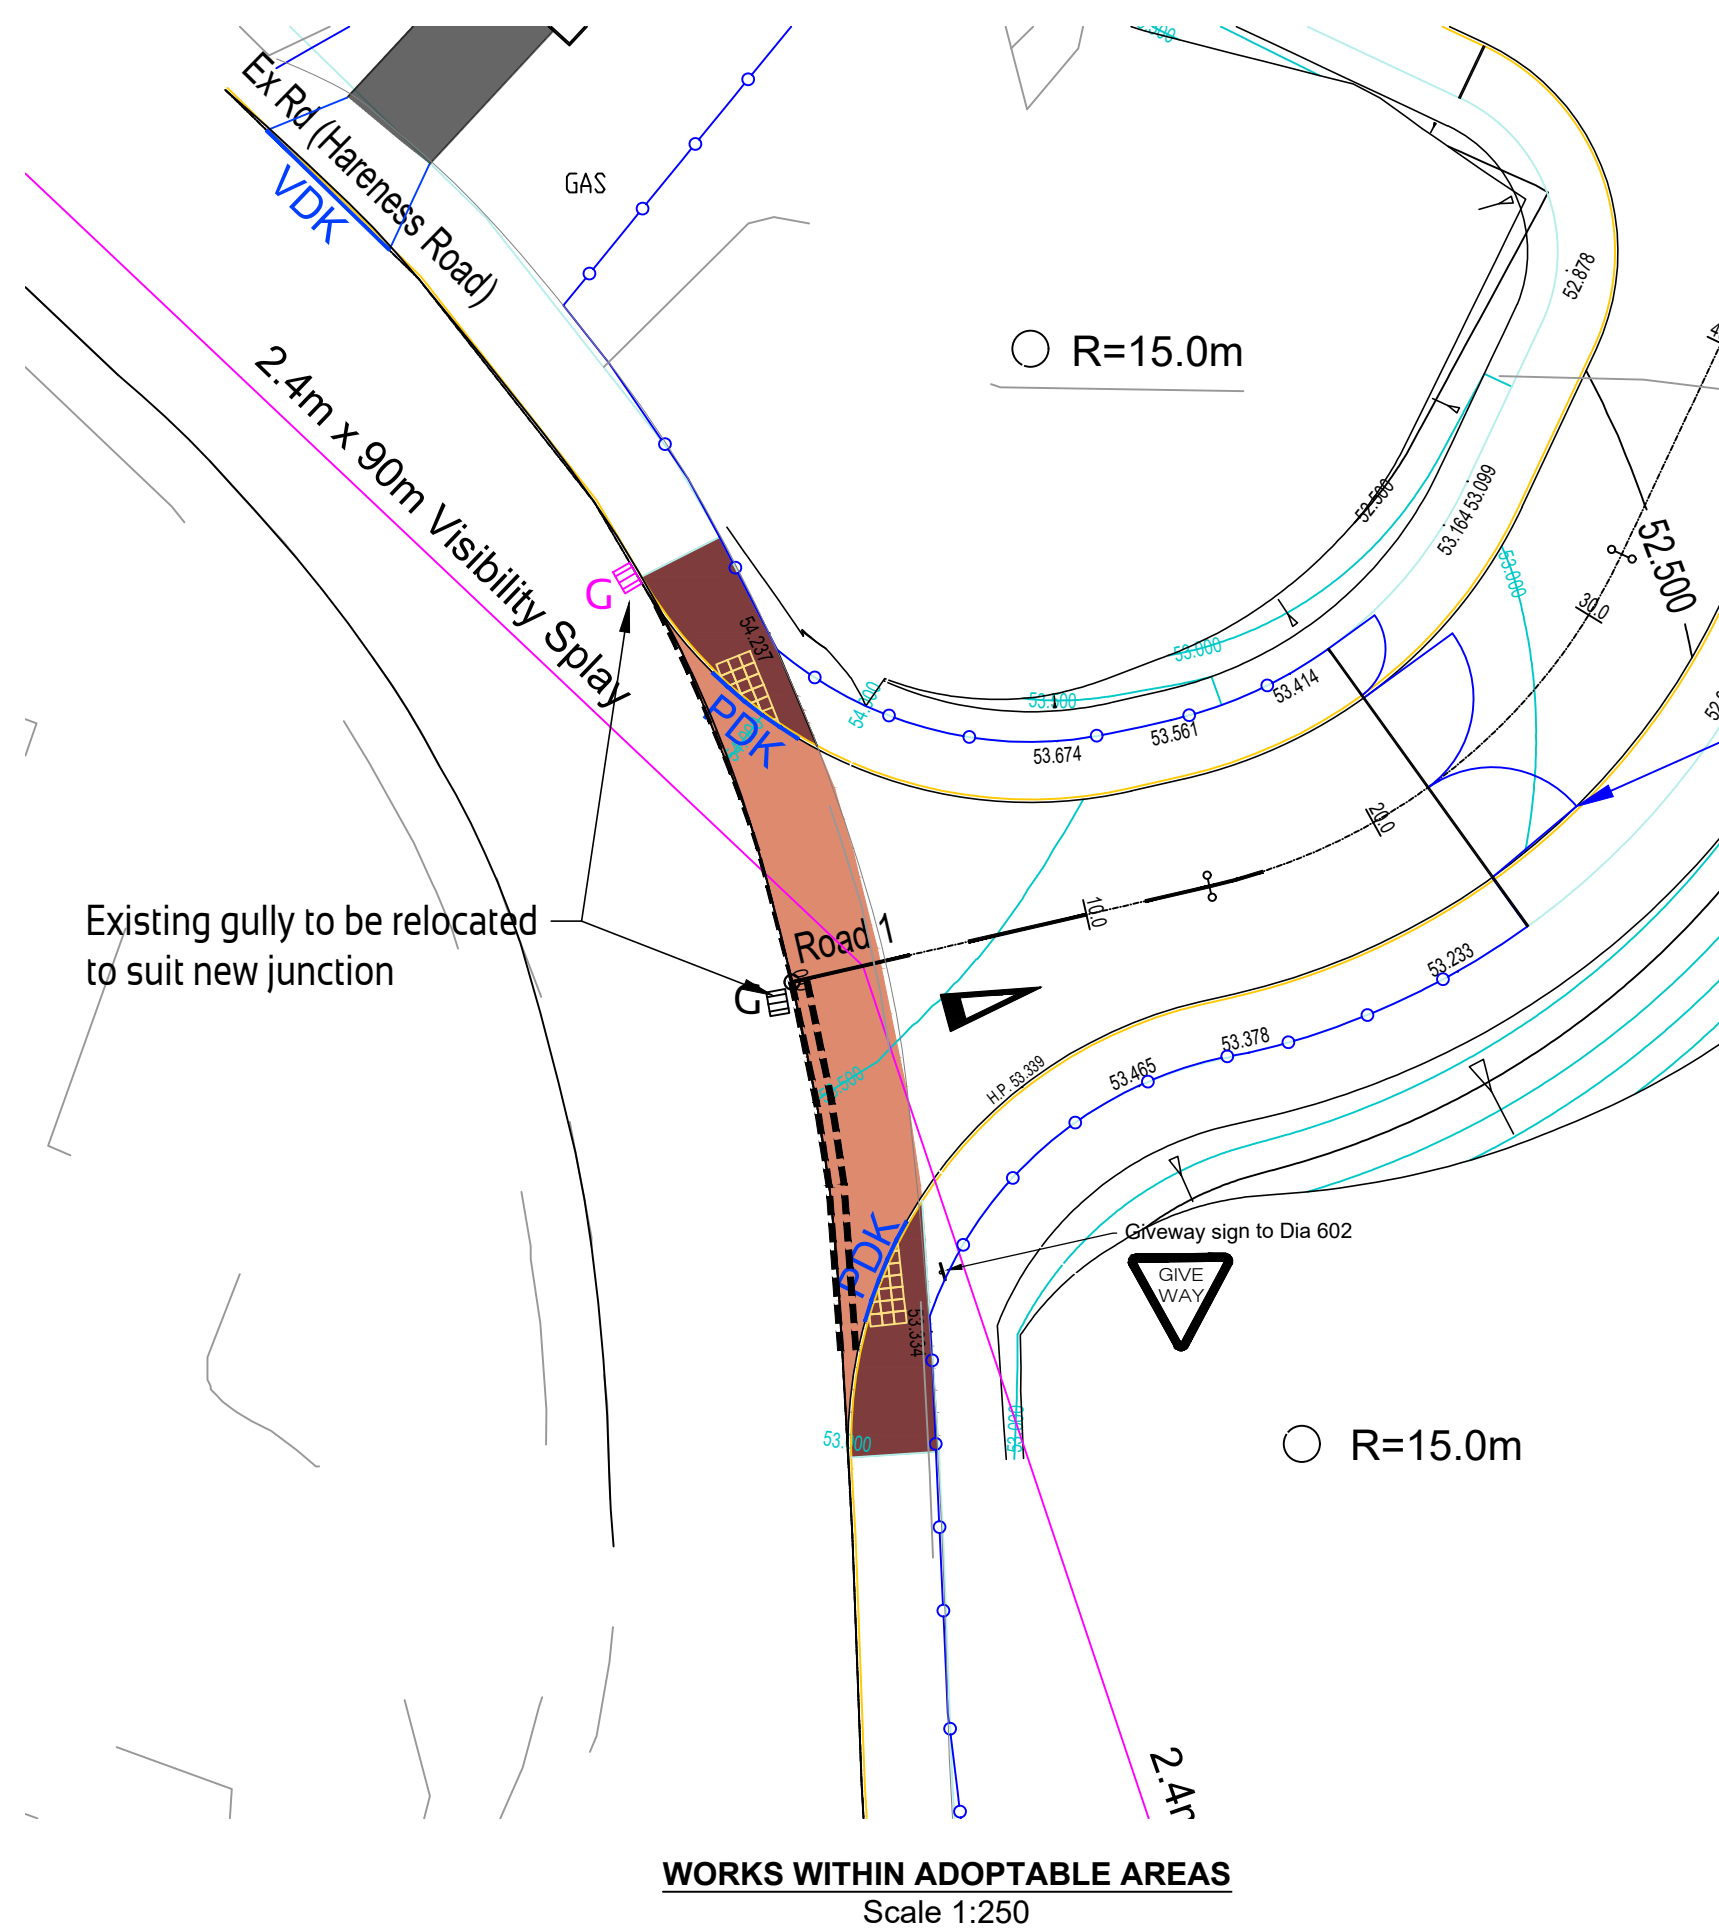

E	Drawing Status updated to TENDER, details added to suit enabling works.	AAM	06/11/2025
D	Added proposed SSE substation	MJA	15/09/2025
C	Amended typo, Aberdeenshire to Aberdeen City Council	MJA	13/06/2025
B	Road markings added and plan to show adoptable areas	MJA	10/06/2025
A	Complete Visibility Splay now displayed on layout & parking spaces now displayed as clouded.	JDP	15/04/2024
Issue	Revision	Initial	Date

Cameron + Ross
CIVIL + STRUCTURAL ENGINEERING

Forbes House | 15 Victoria Street | Aberdeen | AB10 1XB
t 01224 642 400 | w cameronross.co.uk

Mulberry House | 39-41 Harbour Road | Inverness | IV1 1UF
t 01463 575 100 | w cameronross.co.uk

Client:
Energy Transition Zone

Project:
Test Rig Facility
Hareness Road
Aberdeen

Drawing Title:
Junction Access & Yard Layout

Status:
TENDER

Scale: 1:500 @ A1 Date: 17/02/2023
By: AAM Checked: GGC Approved: GGC

Dwg. No. 221193-000-CAM-DR-C-200 Rev. E