


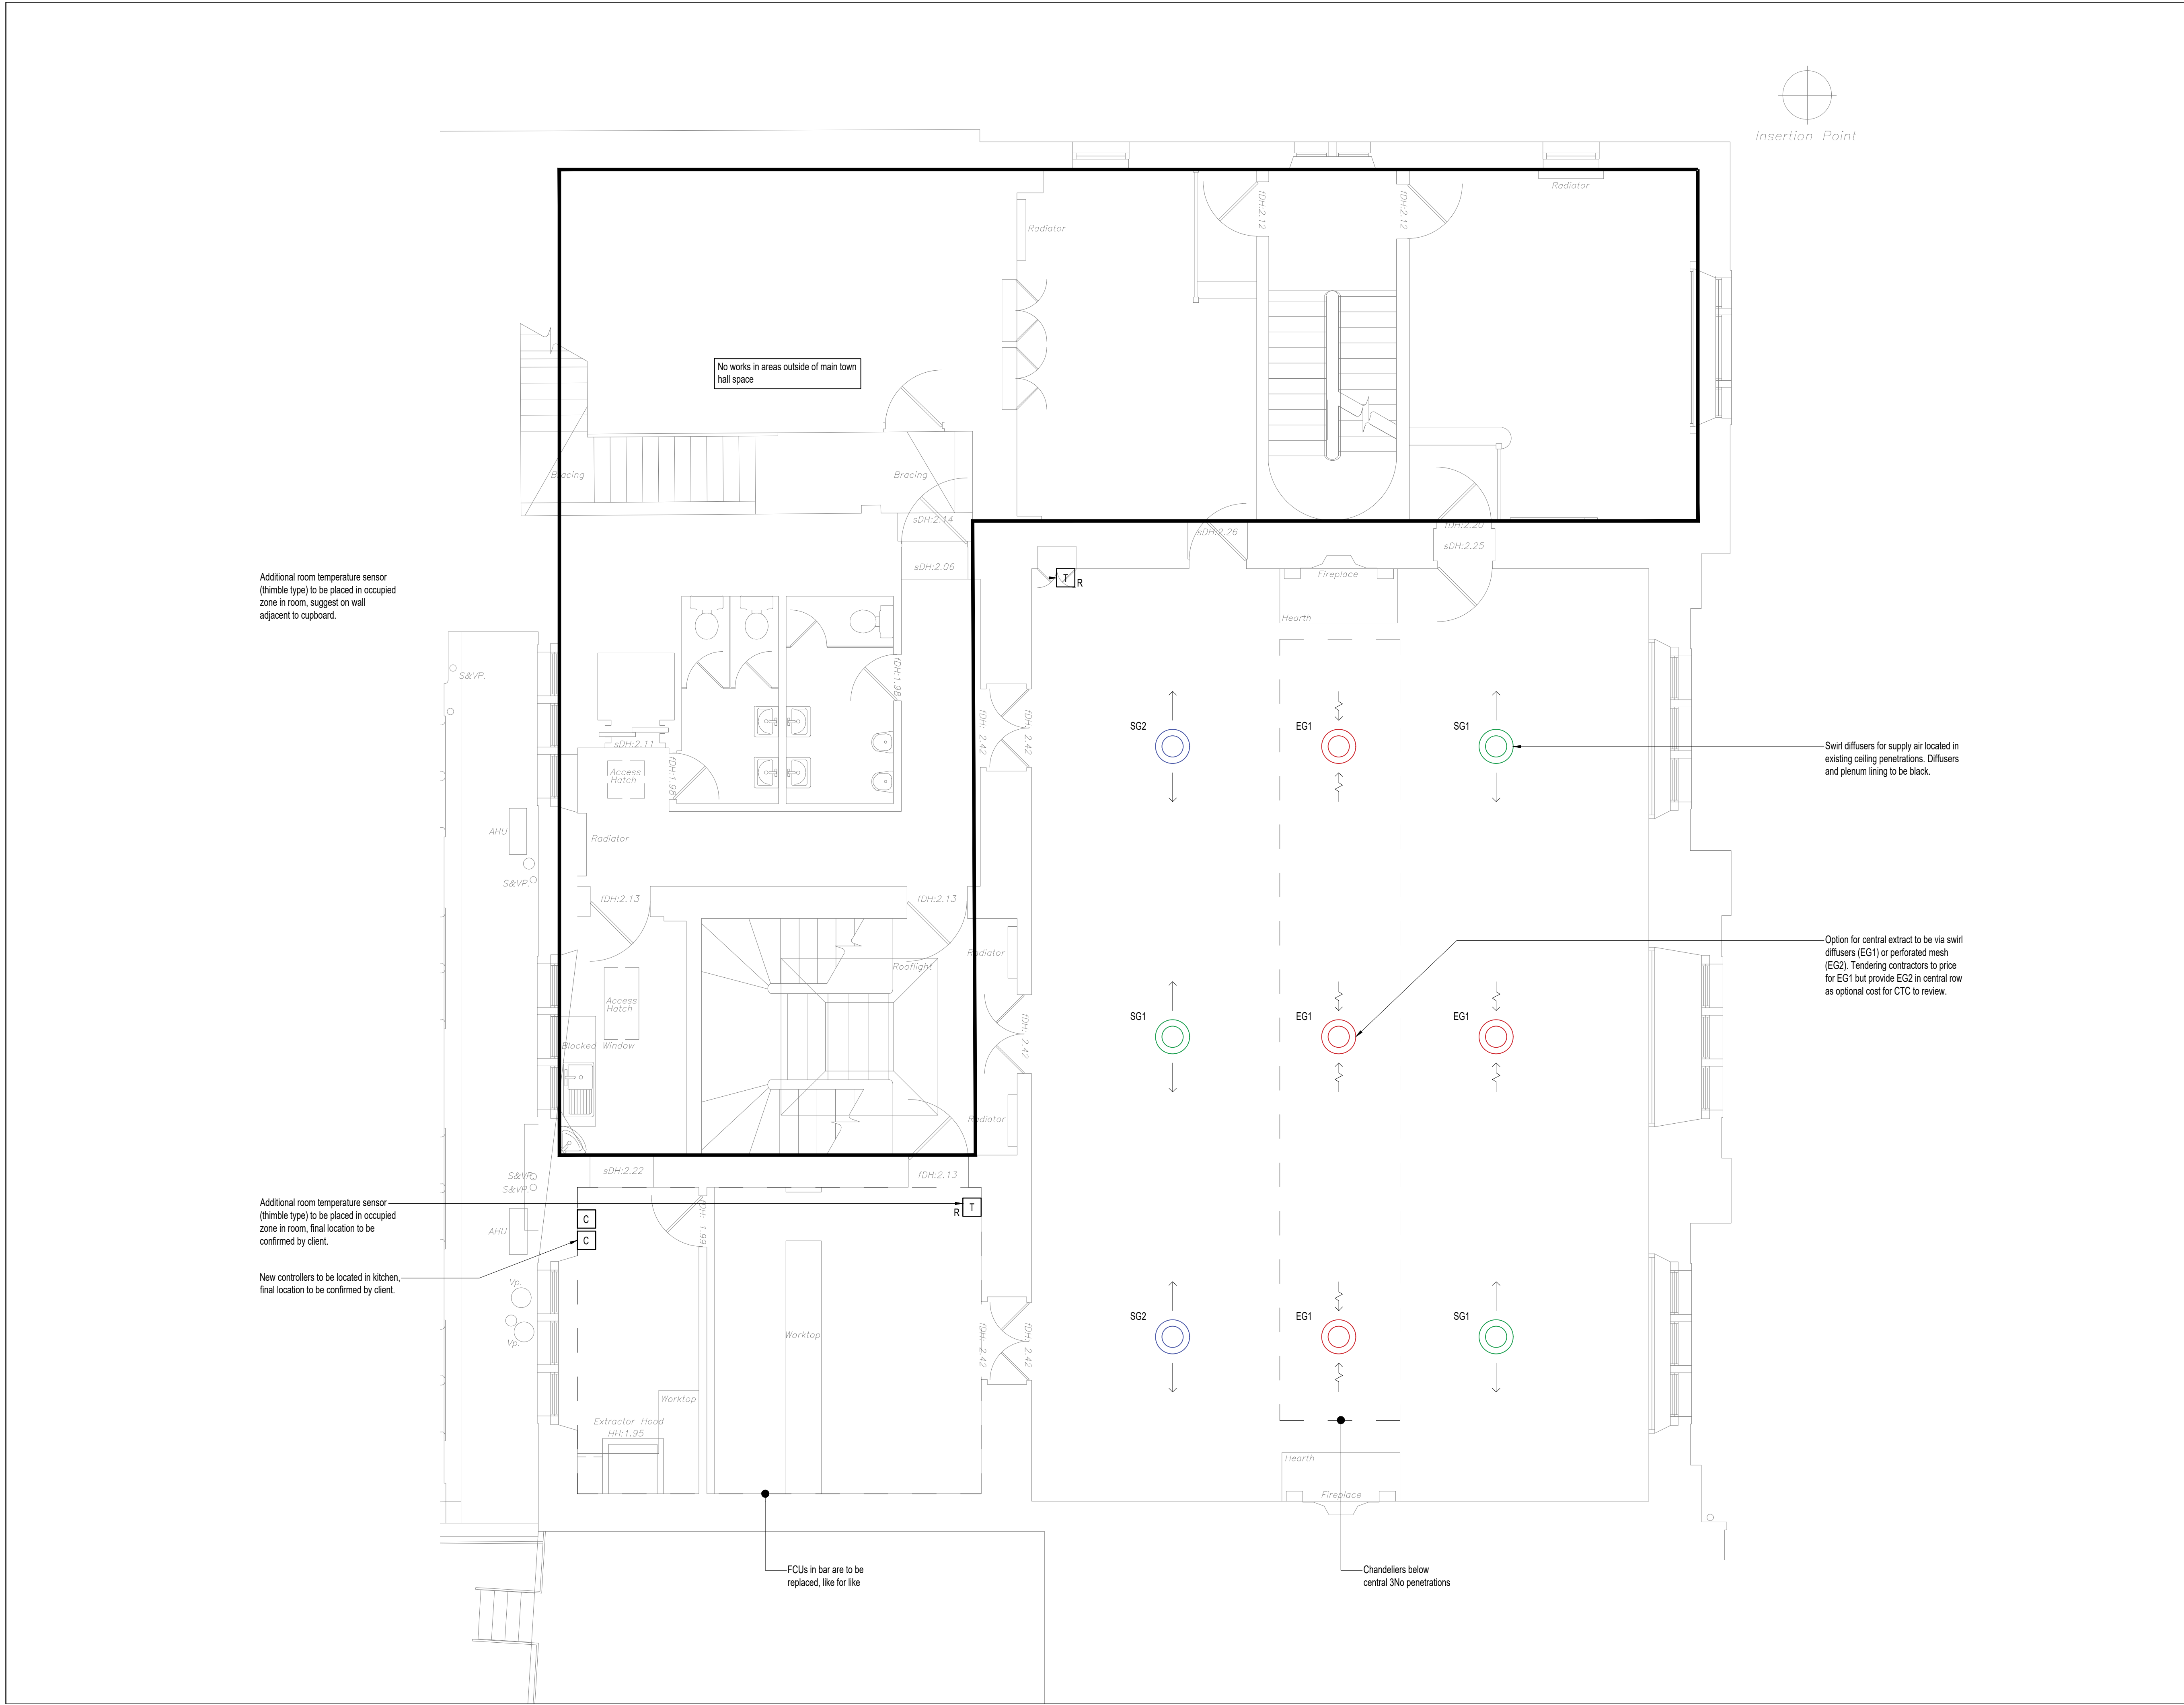

Additional room temperature sensor (thimble type) to be placed in occupied zone in room, suggest on wall adjacent to cupboard.

Additional room temperature sensor (thimble type) to be placed in occupied zone in room, final location to be confirmed by client.

New controllers to be located in kitchen, final location to be confirmed by client.

FCUs in bar are to be replaced, like for like

Chandeliers below central 3No penetrations

Swirl diffusers for supply air located in existing ceiling penetrations. Diffusers and plenum lining to be black.

Option for central extract to be via swirl diffusers (EG1) or perforated mesh (EG2). Tendering contractors to price for EG1 but provide EG2 in central row as optional cost for CTC to review.

Do not scale from this drawing.  
All dimensions to be confirmed on site.

- Notes
- Drawings to be read in conjunction with the schematic drawings and specification.

- Key
- EG Extract grille
  - SG Supply grille
  - C Controller
  - Extract/return air grille
  - Ventilation supply grille
  - Fan coil unit supply grille

|     |           |                    |
|-----|-----------|--------------------|
| T01 | 14 Nov 25 | Tender Issue       |
| P02 | 30 Oct 25 | Draft Tender Issue |
| P01 | 16 Apr 25 | Preliminary Issue  |

Revisions

Client Internal Project No. 4887

Chippenham Town Council

Architect

N/A

**e3** consulting engineers

Queen Square House, 18-21 Queen Square, Bristol, BS14NH  
TEL: 0117 238 0909 www.e3ce.com

Project

Chippenham Town Hall

Title

Town Hall First Floor  
Proposed Mechanical Drawing

Drawing No.  
CTH-E3CE-TH-01-D-M-9010

|           |        |          |        |     |
|-----------|--------|----------|--------|-----|
| Scale     | Author | Reviewer | Status | Rev |
| 1:50 @ A1 | IB     | HG       | -      | T01 |